



How to update or restore the factory presets on the Alesis Photon X25:

1. Download and unzip the factory presets file, currently located at <http://www.alesis.com/index.php?id=58,40,0,0,1,0>
2. Download and install MIDI-OX, available from <http://www.midiox.com/>
3. Connect the Photon X25 to your computer via USB. The sysex preset data can only be sent to the Photon via USB; do not send it via MIDI.
4. Open MIDI-OX.
5. In MIDI_OX, click the “Options” menu and select “MIDI Devices”. In the “MIDI Outputs” section, click on “USB Audio Device” to choose the Photon as your MIDI output Device. Then click OK.

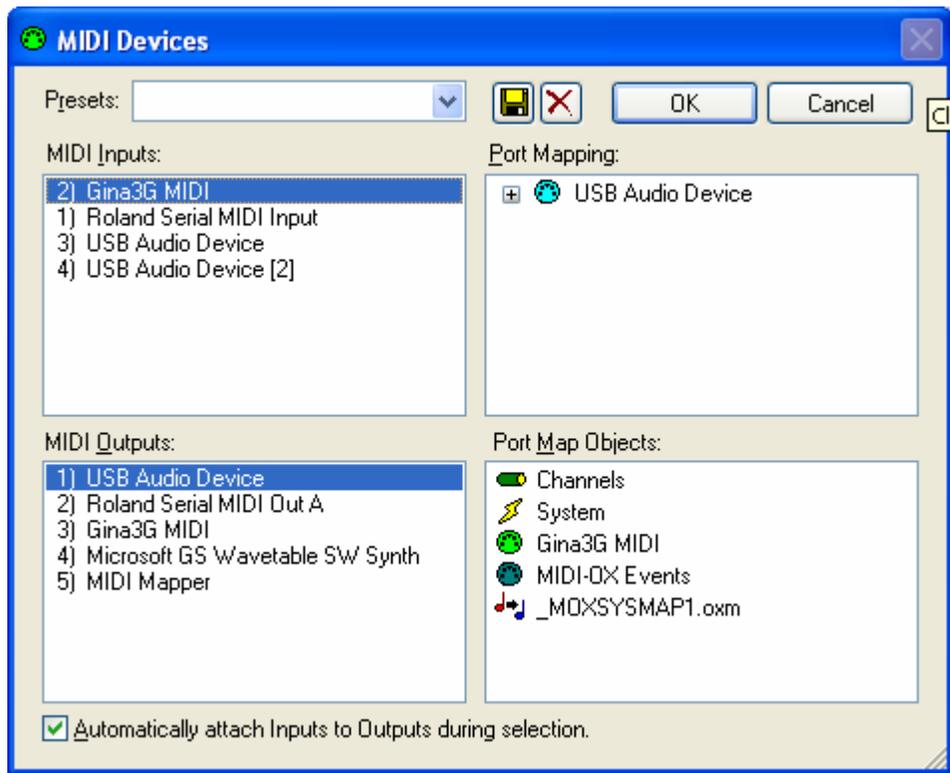

6. In MIDI-OX, change your buffer size by clicking “Options” then “configure buffers”. Set the buffers as shown below, and click OK.

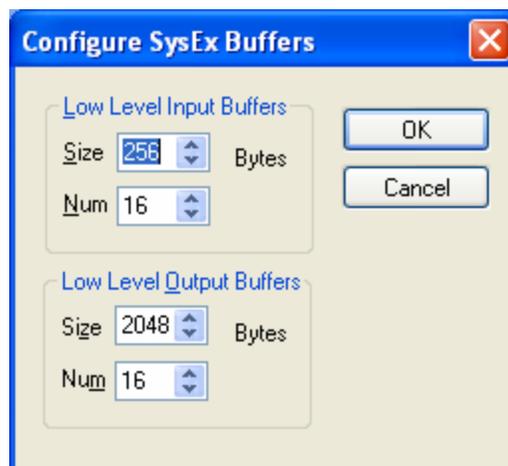

7. Now click the “View” menu and select “Sysex”, and the “Sysex View and Scratch Pad” window should appear.
8. In this window, click “File” and choose “Send Sysex File...”
9. Navigate to where you had previously unzipped the Photon X25 preset .zip file, and double click the .syx file to begin transmitting the preset information to the Photon.
10. The Photon will display “DOWNLOAD STARTED” for approximately 10 seconds as the sysex data is received from MIDI-OX.
11. That’s it! You’re done!